

# **WHATSMINER M56**

## **Product Manual**

October 2024



Shenzhen MicroBT Electronics Technology Co.,Ltd.

[www.whatsminer.com](http://www.whatsminer.com)

# WHATSMINER M56

Immersion Cooling




## SPECIFICATION

|                      |                                      |                   |                                   |
|----------------------|--------------------------------------|-------------------|-----------------------------------|
| Power Ratio          | <b>29 J/T ± 5 %</b>                  | Hashrate          | <b>168 T - 194 T ± 10 %</b>       |
| Weight               | <b>16 kg (Net)<br/>17 kg (Gross)</b> | Size with Handle  | <b>267.5 mm × 147 mm × 401 mm</b> |
| Input Voltage        | <b>AC 380 V - 480 V</b>              | Power Cable Model | <b>Custom made, ≥ 16 A</b>        |
| Internet Connections | <b>Ethernet</b>                      | —                 | —                                 |

## ENVIRONMENTAL PARAMETERS

|                    |   |
|--------------------|---|
| Liquid Temperature | <ul style="list-style-type: none"> <li>① Working temperature (inlet): 20 °C – 45 °C @ normal mode, 20 °C – 40 °C @ high performance mode</li> <li>② Inlet temperature control accuracy: <math>\pm 2</math> °C</li> <li>③ Storage and transportation temperature: -40 °C – +70 °C</li> </ul> |
| Liquid Flow        | <ul style="list-style-type: none"> <li>① Rated flow: <math>\geq 24</math> L/min</li> <li>② Flow control accuracy: <math>\pm 10</math> %</li> </ul>  |
| Liquid Medium      | <p><b>Special coolant: Insulating liquid (S5X/S3X)</b></p>  |
| Humidity           | <ul style="list-style-type: none"> <li>① Storage humidity: 5 % RH – 95 % RH (non-condensing)</li> <li>② Long-term storage humidity: 30 % RH – 69 % RH (non-condensing)</li> </ul>   |

# PERFORMANCE

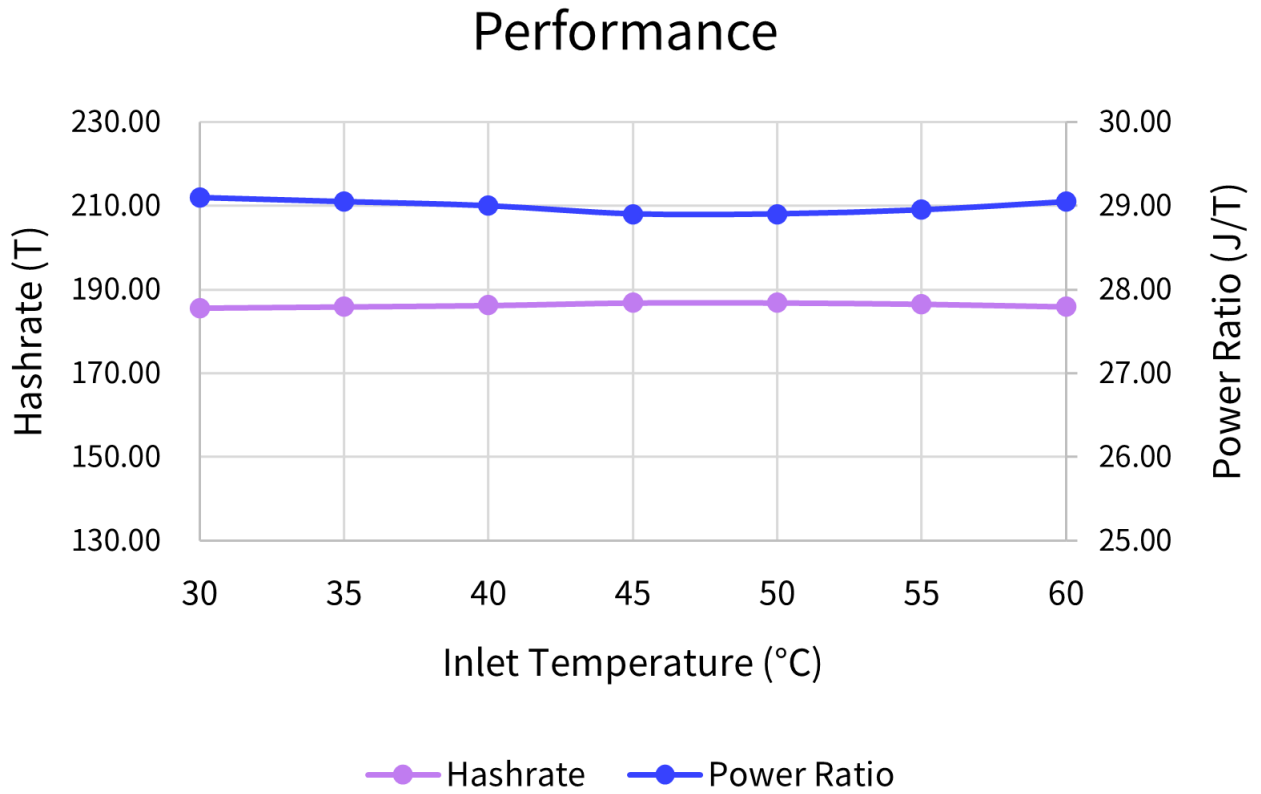

Prototype data for reference only.