

WHATSMINER M63S

Product Manual

October 2024



Shenzhen MicroBT Electronics Technology Co.,Ltd.

www.whatsminer.com

WHATSMINER M63S

Hydro-Cooling (Outlet temperature reaches up to 70 °C)




SPECIFICATION

Power Ratio	18.5 J/T ± 5 %	Hashrate	370 T – 400 T ± 10 %
Weight	27.5 kg (Net) 30 kg (Gross)	Size with Handle	86 mm × 482.6 mm × 663 mm
Input Voltage	AC 380 V – 480 V Input 10 kW	Power Cable Model	Custom made, ≥ 16 A
Coolant Demand Per Machine	About 1 L	Internet Connections	Ethernet

ENVIRONMENTAL PARAMETERS

Liquid Temperature	<ul style="list-style-type: none"> ① Working temperature (inlet): 25 °C – 55 °C @ normal mode, 25 °C – 45 °C @ high performance mode ② Inlet temperature control accuracy: ± 2 °C ③ Storage and transportation temperature: -40 °C – +70 °C
Liquid Flow	<ul style="list-style-type: none"> ① Rated flow: ≥ 10 L/min ② Flow control accuracy: ± 10 %
Liquid Pressure	≤ 400 Kpa
Liquid Medium	Special coolant: Pure water (or distilled water) + special corrosion inhibitor + antifreeze (select a ratio according to a freezing point)
Liquid PH	Control range: 7 – 8.7
Humidity	<ul style="list-style-type: none"> ① Working humidity: 5 % RH – 85 % RH (non-condensing) ② Storage humidity: 5 % RH – 95 % RH (non-condensing) ③ Long-term storage humidity: 30 % RH – 69 % RH (non-condensing)

PERFORMANCE

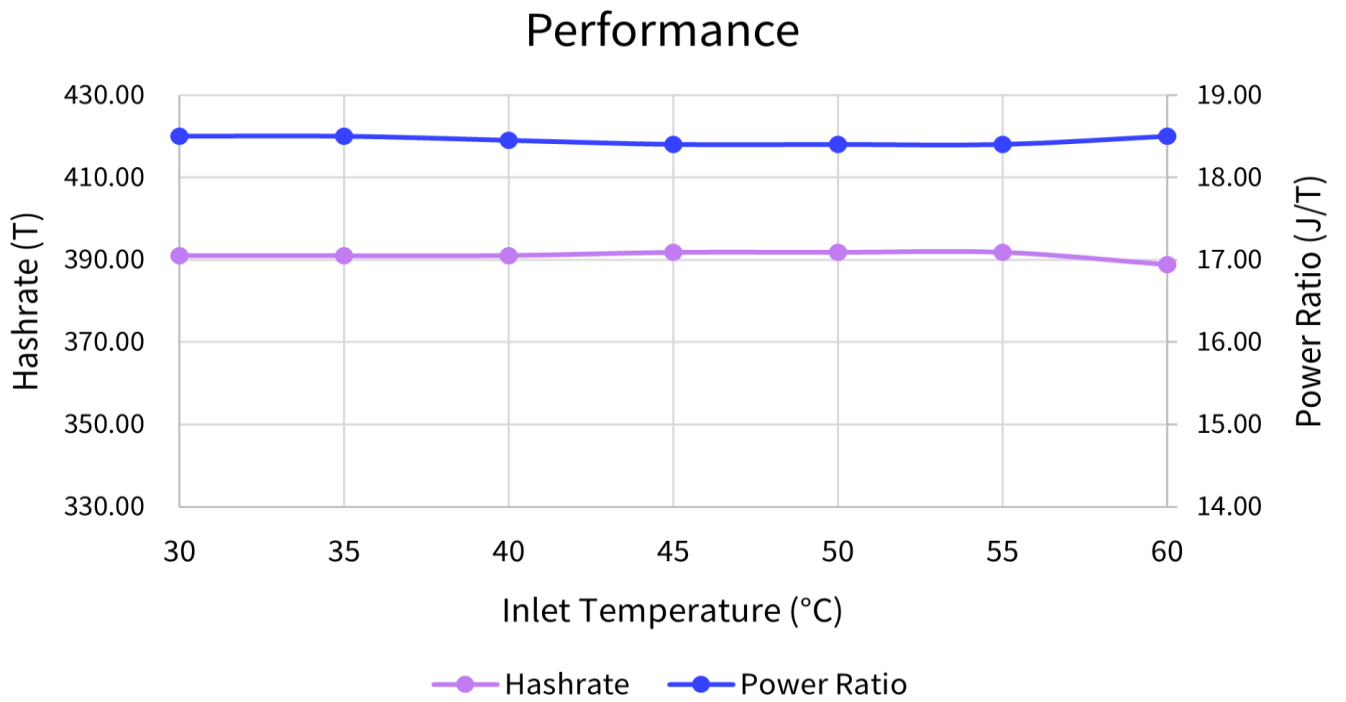

Prototype data for reference only.