

WHATSMINER M66S

Product Manual

October 2024



Shenzhen MicroBT Electronics Technology Co.,Ltd.

www.whatsminer.com

WHATSMINER M66S

Immersion Cooling




SPECIFICATION

Power Ratio	18.5 J/T ± 5 %	Hashrate	270 T - 298 T ± 10 %
Weight	16 kg (Net) 17 kg (Gross)	Size with Handle	267.5 mm × 147 mm × 401 mm
Input Voltage	AC 380 V - 480 V	Power Cable Model	Custom made, ≥ 16 A
Internet Connections	Ethernet	—	—

ENVIRONMENTAL PARAMETERS

Liquid Temperature	<ul style="list-style-type: none"> ① Working temperature (inlet): 25 °C – 55 °C @ normal mode, 25 °C – 45 °C @ high performance mode ② Inlet temperature control accuracy: ± 2 °C ③ Storage and transportation temperature: -40 °C – +70 °C
Liquid Flow	<ul style="list-style-type: none"> ① Rated flow: ≥ 24 L/min ② Flow control accuracy: ± 10 %
Liquid Medium	<p>Special coolant: Insulating liquid (S5X/S3X)</p>
Humidity	<ul style="list-style-type: none"> ① Storage humidity: 5 % RH – 95 % RH (non-condensing) ② Long-term storage humidity: 30 % RH – 69 % RH (non-condensing)

PERFORMANCE

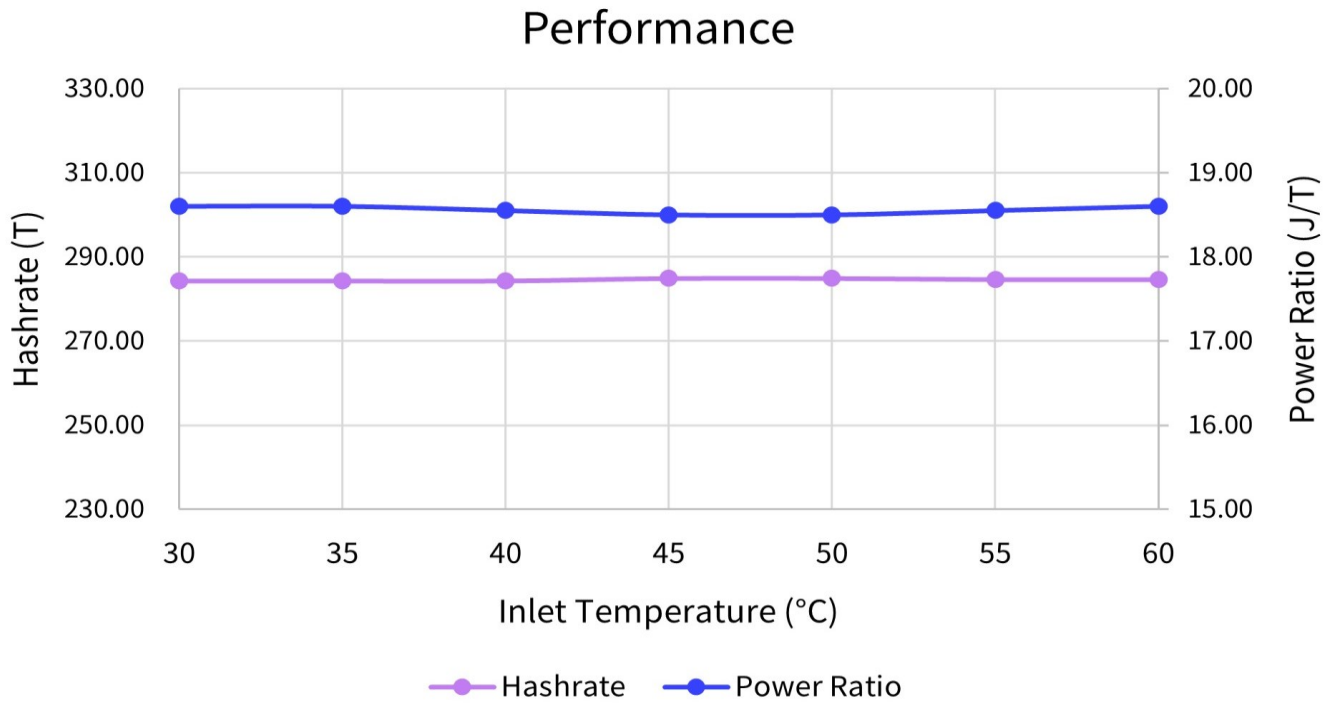

Prototype data for reference only.