



# **WHATSMINER M76S+**

## **Product Manual**

December 2025



Shenzhen MicroBT Electronics Technology Co.,Ltd.

[www.whatsminer.com](http://www.whatsminer.com)

# WHATSMINER M76S+

Immersion Cooling




## SPECIFICATION

|                     |                                      |                   |                                                                                                        |
|---------------------|--------------------------------------|-------------------|--------------------------------------------------------------------------------------------------------|
| Power Ratio         | <b>12.5 J/T <math>\pm</math> 5 %</b> | Hashrate          | <b>390 T – 440 T <math>\pm</math> 10 %</b>                                                             |
| Weight              | <b>18 kg (Net)<br/>19 kg (Gross)</b> | Size with Handle  | <b>401 mm <math>\times</math> 267.5 mm <math>\times</math> 147 mm</b>                                  |
| Input Voltage       | <b>AC 380 V – 480 V</b>              | Power Cable Model | <b>Custom made, <math>\geq</math> 16 A</b>                                                             |
| Internet Connection | <b>Ethernet</b>                      | Power             | <b>5200 W <math>\pm</math> 10% @normal mode<br/>7000 W <math>\pm</math> 10% @high performance mode</b> |

## ENVIRONMENTAL PARAMETERS

|                    |                                                                                                                                                                                                                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Liquid Temperature | <ul style="list-style-type: none"> <li>① <b>Working temperature (inlet): 25 °C – 55 °C @ normal mode, 25 °C – 45 °C @ high performance mode</b></li> <li>② <b>Inlet temperature control accuracy: <math>\pm 2</math> °C</b></li> <li>③ <b>Storage and transportation temperature: -40 °C – +70 °C</b></li> </ul> |
| Liquid Flow        | <ul style="list-style-type: none"> <li>① <b>Rated flow: <math>\geq 24</math> L/min</b></li> <li>② <b>Flow control accuracy: <math>\pm 10</math> %</b></li> </ul>                                                                                                                                                 |
| Liquid Medium      | <b>Special coolant: Insulating liquid (S5X/S3X)</b>                                                                                                                                                                                                                                                              |
| Humidity           | <ul style="list-style-type: none"> <li>① <b>Storage humidity: 5 % RH – 95 % RH (non-condensing)</b></li> <li>② <b>Long-term storage humidity: 30 % RH – 69 % RH (non-condensing)</b></li> </ul>                                                                                                                  |

## PERFORMANCE

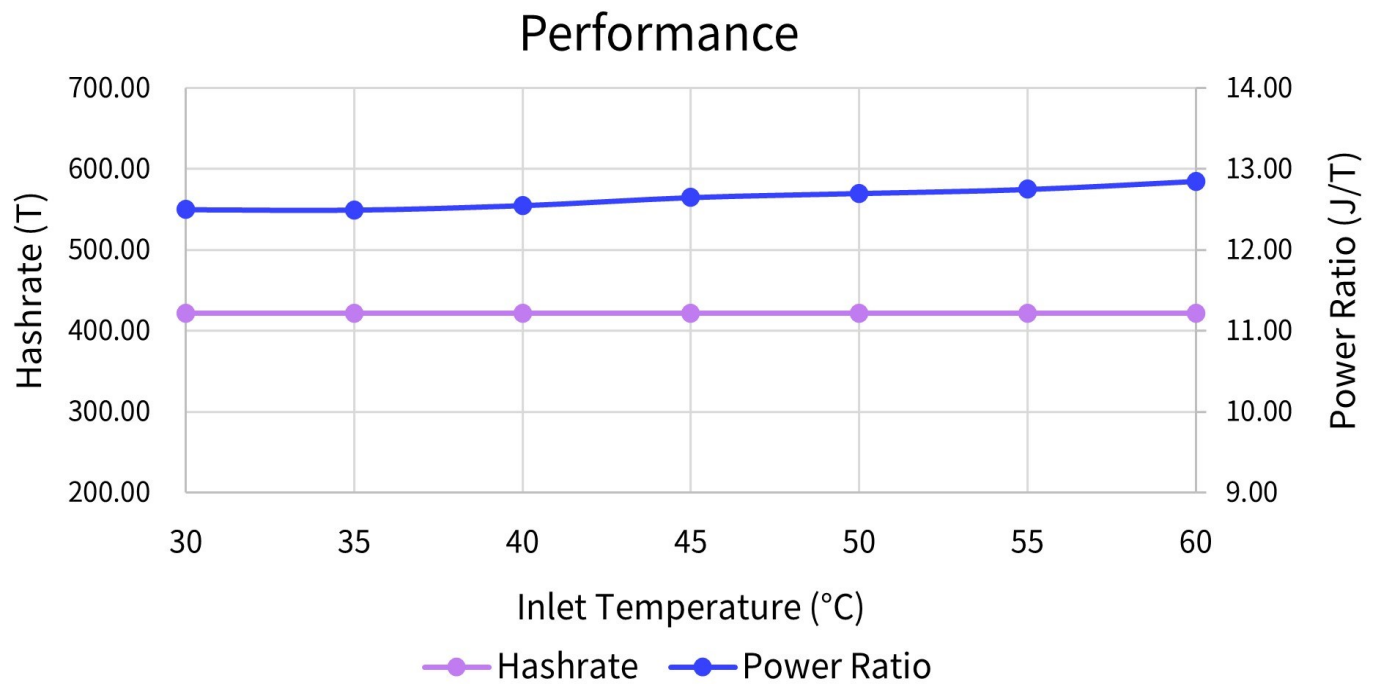

Prototype data for reference only.