



WHATSMINER M76S

Product Manual

December 2025



Shenzhen MicroBT Electronics Technology Co.,Ltd.

www.whatsminer.com

WHATSMINER M76S

Immersion Cooling




SPECIFICATION

Power Ratio	13.5 J/T $\pm$ 5 %	Hashrate	362 T – 406 T $\pm$ 10 %
Weight	18 kg (Net) 19 kg (Gross)	Size with Handle	401 mm $\times$ 267.5 mm $\times$ 147 mm
Input Voltage	AC 380 V – 480 V	Power Cable Model	Custom made, $\geq$ 16 A
Internet Connection	Ethernet	Power	5200 W $\pm$ 10% @normal mode 7000 W $\pm$ 10% @high performance mode

ENVIRONMENTAL PARAMETERS

Liquid Temperature	① Working temperature (inlet): 25 °C – 55 °C @ normal mode, 25 °C – 45 °C @ high performance mode ② Inlet temperature control accuracy: ± 2 °C ③ Storage and transportation temperature: -40 °C – +70 °C
Liquid Flow	① Rated flow: ≥ 24 L/min ② Flow control accuracy: ± 10 %
Liquid Medium	Special coolant: Insulating liquid (S5X/S3X)
Humidity	① Storage humidity: 5 % RH – 95 % RH (non-condensing) ② Long-term storage humidity: 30 % RH – 69 % RH (non-condensing)

PERFORMANCE

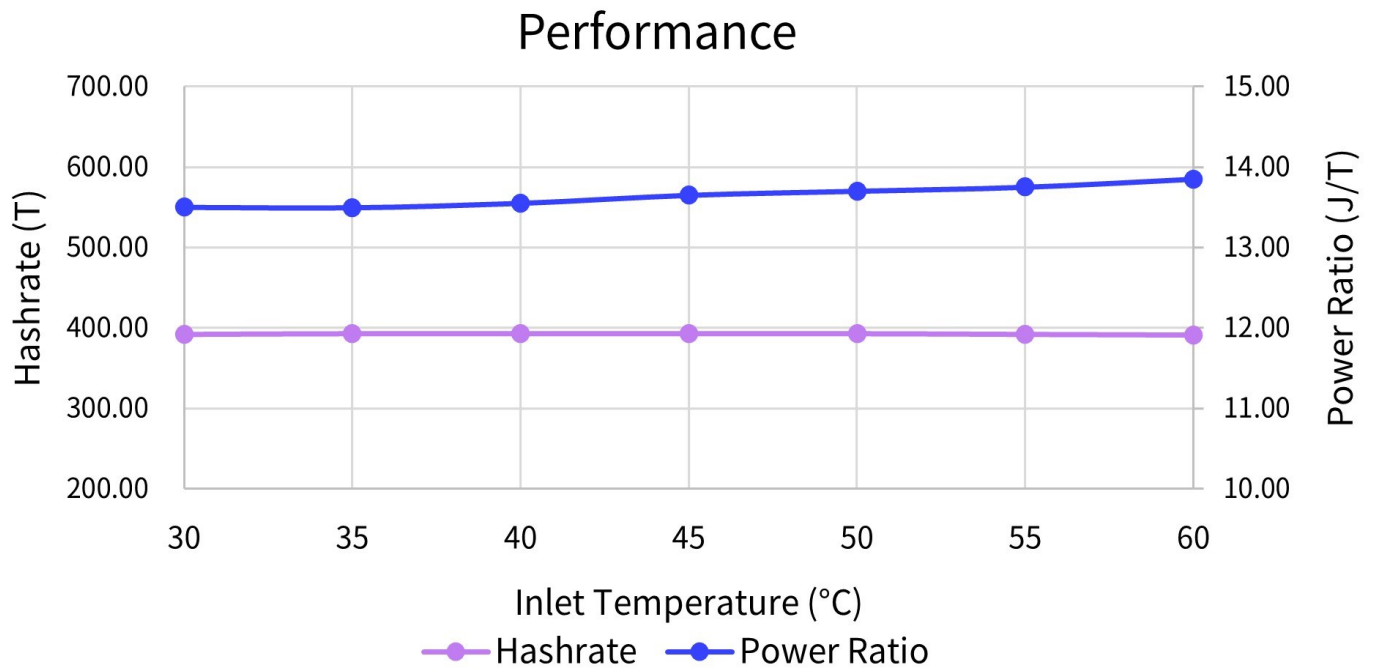

Prototype data for reference only.